

**Unverferth**<sup>®</sup> Tillage

*Ripper-Stripper*<sup>®</sup> Strip-Till Tillage Tool



***One-Stop,  
Strip-Till Shop***

*Models 332 and 312*



## Seedbed Tillage Options

Numerous tillage attachments, including variations of blades, baskets and firmers of those highlighted below, are available to match your tillage preferences. All feature parallel-link mounting for consistent operating depth across the field and are width, depth and downpressure adjustable. All pivot points feature hardened-steel bushings for reduced maintenance.



**The dual-coulter strip builders** followed by 15" wide Rolling Harrow soil conditioner baskets provide a conventionally prepared seedbed. The Rolling Harrow basket features scalloped, angled blades to chop and evenly distribute soil and residue.



**Two additional coulters** can be added to the standard dual-coulters. The quad-coulter configuration offers more aggressive and thorough tillage.



**Notched or smooth concave blades** with concave Rolling Harrow basket for more aggressive tillage. Rolling Harrow basket's spring-tension-controlled downpressure ensures level, consistent operation.




**17" or 20" wide Zone-Firmer wheels** following the strip-till coulters firm the seedbed for better moisture retention in lighter soils. Optional scraper blades are available for wetter soils.



**Plastic shank protectors** provide non-stick performance in tacky soils. **Steel shank protectors** are also available for enhanced shank durability in abrasive soils.



**Angled press wheels and Zone Firmer wheels** feature adjustable downpressure from 0 to 360 pounds to create a more level soil surface and firmer seedbed in lighter soils.

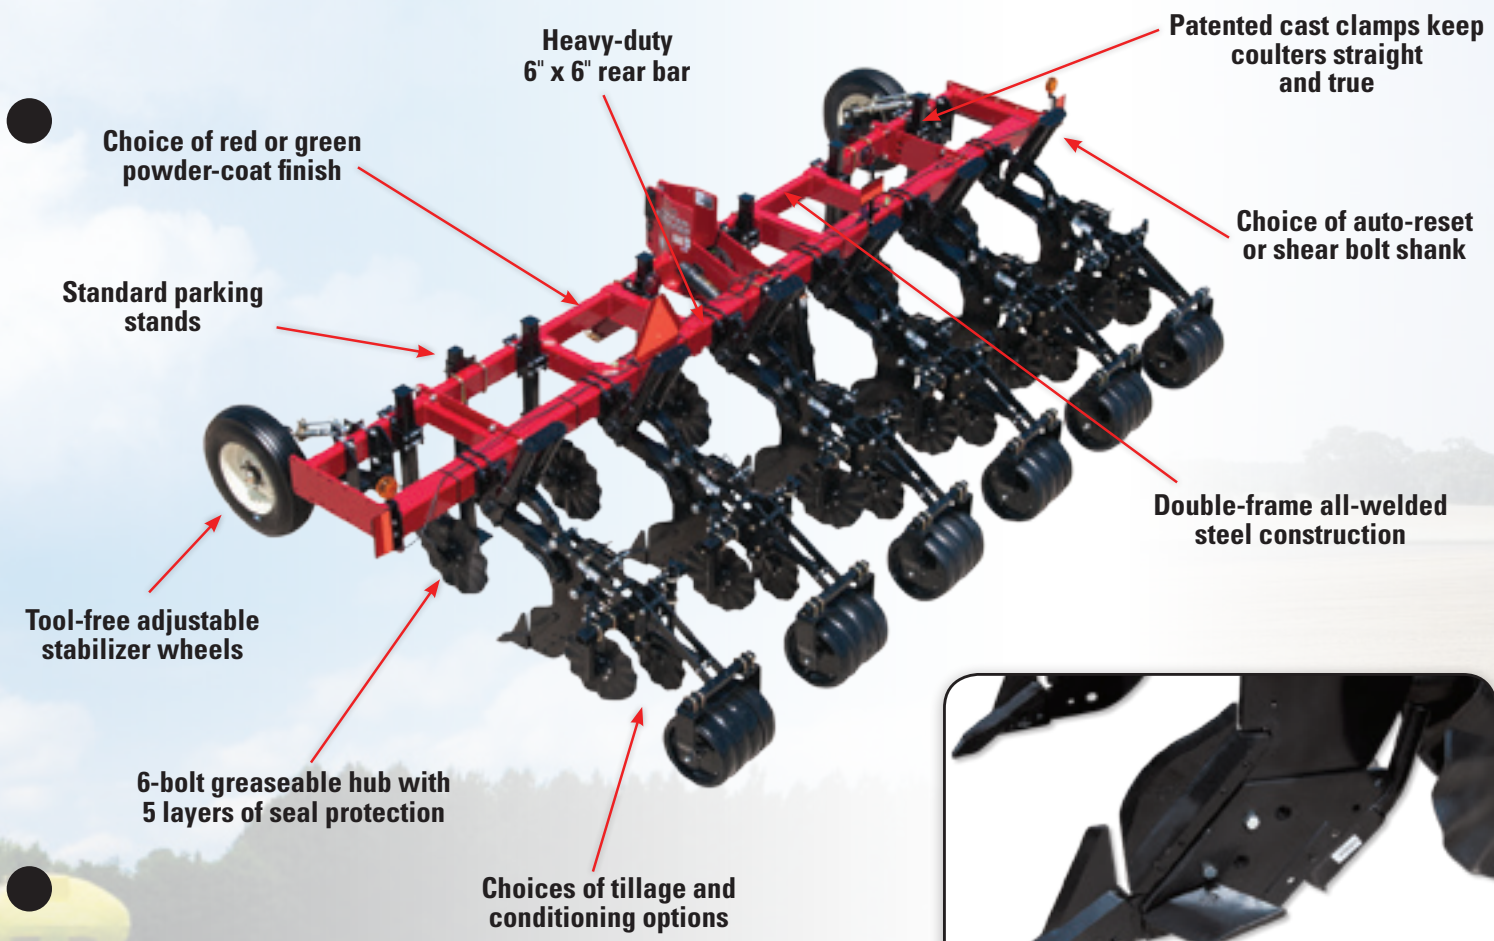

Choice of red or green powder-coat finish

Heavy-duty 6" x 6" rear bar

Patented cast clamps keep coulters straight and true

Standard parking stands

Choice of auto-reset or shear bolt shank

Double-frame all-welded steel construction

Tool-free adjustable stabilizer wheels

6-bolt greaseable hub with 5 layers of seal protection

Choices of tillage and conditioning options



*Shanks can also be fitted with 7", angle-adjustable wings from 0° to 14° slope for additional lifting and shattering action.*



Model 332



Model 312

*Special-alloy deep-till shanks feature heat-treated, patent-pending shark-fin points and wearbars for easier pulling and extended shank life.*



*Optional hydraulic flex frame with 15 degrees of upward and 5 degrees of downward movement for easily following ground contours for 8 row and larger folding sizes.*

# Ripper-Stripper®: One-Stop, Strip-Till Shop

## Tillage serves three primary purposes:

1. Create a seedbed that warms quickly.
2. Provide optimum seed-to-soil contact for enhanced germination and vigorous early plant growth.
3. Make it easy for plant roots, moisture and nutrients to move freely throughout the soil.

The Ripper-Stripper® strip-till tool from Unverferth does it all – in one pass – spring or fall – whether cutting through prior year row crop or cover crop residue.

Here's the best part. The Ripper-Stripper strip-till tool, with a large variety of shank, tillage, planter and fertilizer attachments, is easily customized for matching your soil and management needs. The base unit includes:

1. Choice of residue sizing and path-clearing attachments of lead coulters with 20", 13-wave blades, coulters with side-mounted floating row cleaners for added residue clearing, or cover crop roller with 11" diameter drum and torsion-flex mounting for smooth operation.
2. The ¾" wide and angled deep-till shanks, in choice of shear bolt-protected or automatic reset, break up compaction in the root zone from 9" to 18" with minimal soil disturbance.
  - The model 332 with automatic-reset shanks features trip pressure of 6,000 pounds per shank for consistent working depth. They trip upward and rearward from a single pivot point, reducing rocks and other in-field obstacles to minor inconveniences.
  - The model 312 with shear bolt-protected shanks features trip pressure of 7,500 pounds per shank for use in lighter, obstruction-free soils.
3. A wide variety of shank-mounted seedbed tillage choices to meet your soil and residue conditions complete the tillage trip.



*The optional floating row cleaner easily attaches to the coulter and features independent height adjustment, curved single-finger design and adjustable spring downpressure to easily follow ground contours.*



*The cover crop roller features chevron-patterned blades that crimp and deflect residue away from row and a smooth coulter blade to create a path for the shank. Torsion-flex mounting allows rollers to follow ground contours and go up and over field obstacles.*

## Accessories

For a complete one-pass planting system, the Ripper-Stripper strip-till tillage tool can be equipped with a variety of choices for one-pass planting and greater productivity.

The semi-mounted planter attachment easily connects to all models and features castered, lift-assist wheels for faster planter lifting and more stable road transport. Packages include two caster wheels for 4-, 6- and 8-row models; three or four for 12-row models and four for 16-row models. The standard hydraulic weight-transfer for 12- and 16-row units reduces lift requirements of the tractor's three-point hitch.

A lift-assist package for 8-, 12- and 16-row Ripper-Stripper models provides added lifting power of the tractor's three-point hitch.

Floating mounting arms attach directly from 4- and 6-row units to planters for one-pass strip-tilling and planting.

Additional options include transport light package for safer road travel, shank-mounting extension kits for staggering the shanks rearward, fertilizer injectors, pull-through hitch for towing fertilizer carriers and row markers.



**Semi-mounted lift-assist packages** that mount directly to 8-, 12- and 16-row planters.



**Optional hydraulic lift-assist** option for more easily raising the Ripper-Stripper unit.



**Depth-adjustable dry or liquid fertilizer injectors** can be mounted to deep-till shanks for in-row fertilizer placement for optimum nutrient uptake.



**Easily convert** any size Ripper-Stripper implement to pull-type operation with model 700, 500 or 300 implement caddys, or pull-type, bolt-on conversion packages.

## Specifications

<b>Ripper-Stripper® Strip-Till Tillage Tool</b>					
Rows	Shank spacing	Stabilizer tire size	Overall width/height	Model 332 w/ conventional strip builder appx. weight (lbs.)	Model 312 w/ conventional strip builder appx. weight (lbs.)
2	36" rigid	7.60 x 15 8-ply (2)	10'	2,800	2,300
2	38" rigid	7.60 x 15 8-ply (2)	11'4"	2,800	2,300
2	40" rigid	7.60 x 15 8-ply (2)	11'4"	2,900	2,400
4	30" rigid	7.60 x 15 8-ply (2)	11'4"	3,760	3,120
4	36", 38" and 40" rigid	7.60 x 15 8-ply (2)	13'9"	3,900	3,360
6	30" rigid	7.60 x 15 8-ply (2)	16'6"	5,305	4,435
6	36" and 38" rigid	7.60 x 15 8-ply (2)	19'5"	5,525	4,680
8	30" rigid	7.60 x 15 8-ply (2)	22'	6,655	5,605
8	30" folding	9.5L x 15 8-ply (2)	15'6"/7'	7,690	6,665
8	36" and 38" folding	9.5L x 15 8-ply (2)	16'6"/9'8"	8,075	7,385
8	40" folding	9.5L x 15 8-ply (2)	15'6"/10'2"	8,075	7,385
12	30" folding	12.5L x 15 10-ply (4)	15'6"/12'4"	10,725	9,195
12	36" folding	12.5L x 15 10-ply (4)	21'7"/12'3"	12,040	10,565
12	38" folding	12.5L x 15 10-ply (4)	21'/13'1"	12,040	10,565
12	40" folding	12.5L x 15 10-ply (4)	20'5"/13'10"	12,110	10,635
16	30" folding	12.5L x 15 10-ply (4)	20'10"/14'3"	14,555	13,025

### Hitch Specifications

- **Horsepower requirements** of 20–40 per shank
  - **Rigid frame** — All — Cat 2, Cat 2 QC (4-row), Cat 3, Cat 3 QC & Cat 3 N QC
  - **Folding models** — 8-row 36" through 12-row 30" — Cat 3, Cat 3 QC, Cat 3 N QC, Cat 4, Cat 4 QC & Cat 4 N QC
  - **Folding models** — 12-row 36" through 16-row 30" — Cat 3, Cat 3 QC, Cat 3 N QC, Cat 4, Cat 4 QC & Cat 4 N QC
- QC denotes Quick Couple and N QC denotes Narrow Quick Couple.

**See your Unverferth dealer today or check our website at [umequip.com](http://umequip.com) for complete details on the Ripper-Stripper strip-till tillage tool and customizing it to your specific needs.**

Due to continuing improvements in the design and manufacture of Unverferth products, all specifications contained herein are subject to change without notice.

**Unverferth**  
Manufacturing Company, Inc.

P.O. Box 357 • Kalida, Ohio 45853  
(419) 532-3121  
[unverferth.com](http://unverferth.com)

©2017 Unverferth Manufacturing Co., Inc. Printed in U.S.A.

®™ Trademarks, registered or applied for, of Unverferth Manufacturing Co., Inc., Kalida, OH

Additional facilities in California, Georgia, Iowa, Nebraska, North Dakota, Oregon, Ontario and Saskatchewan, Canada



URS71517005M7



# **UNVERFERTH RIPPER-BEDDER**

## **ONE-PASS SOIL PREP FOR BEDDED CROPS**



**SEEDBED TILLAGE**

Model 432  
[umequip.com](http://umequip.com)



## Unverferth® RIPPER-BEDDER

### **FIGHT COMPACTION AND PREPARE SEEDBEDS IN ONE PASS**

*The Unverferth Model 432 Ripper-Bedder deep tills, raises and shapes beds in one pass to optimize germination conditions and encourage vigorous early growth for peanuts, cotton, hemp and other bedded crops. Save time, save fuel and prepare your rows in one pass with this all-in-one tool.*

#### **Model 432 Main Features**

- Auto-reset trip design with 6,000 pounds of trip pressure
- Heavy-duty cast pull arm can trip upward and rearward to avoid obstacles and quickly resets without the need for shear-bolt replacement
- Shanks are steep-sloped and constructed of a special .75" thick alloy for extra durability and feature replaceable raised-center shark-fin points
- Till up to 18" deep for shattering hardpan with minimal soil surface disruption
- Patented 1.25" wide shark fin wearbars extend the shank life and reduce soil disturbance

#### **Frame Standard Features**

- Heavy-duty, double frame with 6" x 6" rear mounting bar for maximum durability
- Stabilizer wheels provide added stability and tool-free adjustment for quick and convenient setting of depth
- Rigid models are equipped with 7.6L x 15 8-ply tires, folding models up to 12-row 30" feature 9.5L x 15 8-ply tires on base and wings, and 12-row models with 36" and wider spacings feature 12.5L x 15 10-ply tires on base
- Transport lights and reflective markings for safer road transport
- Powder-coated frame in tractor red or green for a long-lasting, durable finish



**Rugged shank design**



# BEDDING ATTACHMENTS

*For finishing off your seedbed, choose from bedding disks with a fully adjustable parallel-link design or economical spring-reset or rigid listers.*

## Disk Gang

- Features 18" inner and 20" outer concave blades on 36", 38" or 40" wide spacings, 20" blades for 30" spacing
- Gangs can be positioned at 7°, 13°, 19° or 24° angles to meet individual needs
- Gangs can be staggered for rounded beds to capture and retain more moisture, or opposed for a taller peaked bed
- Disk gang arms are tool-free adjustable and can be easily changed to fully floating, limited float or rigid setting to match your field conditions
- Gauge wheel package with 20.5 x 8-10-ply tires on the bedding disk provides flotation in tilled soils when bedding disks are operated in floating position



## Listers

- 10"-wide furrow shovels for 30" spacing or 15" shovels for wider spacings provide economical bedding for a wide variety of applications
- Choose from a spring-reset lister shank design or a rigid shank design to meet individual needs



## Bed Shaper Kits

- Bolts onto the back of the bedding disk or lister toolbar for consistent bed shaping
- Tool-free spring downpressure settings to tailor beds to your needs



# ACCESSORIES

Customize your Model 432 to your exact needs with these optional accessories.

- **Scraper kits** bolt onto the bedding disk arm and require minimal adjustment when changing the disk cutting angle
- **Lead coulter** with a swivel design is equipped with 20", 13-wave blades and 1,500 pounds of downforce
- **Patented flex-frame hydraulics** on folding models with 36", 38" and 40" spacings allow the wings to float up 15 degrees and down 5 degrees to follow ground contours
- **Three-Point Implement Caddy** easily converts the Ripper-Bedder or other three-point implements into a pull-type unit
- **Plastic shank protectors** provide non-stick performance and prevent against damage in tacky and abrasive soils



Optional shatter wings and shank protectors

- **Steel shank protectors** provide added shank life in any soil type
- **7" or 9" shatter wings** can be added to the point and are angle-adjustable from zero to 14 degrees for greater soil surface disturbance
- **Row-markers** feature 16" notched blades that leave a highly visible mark and come complete with hydraulics and sequence valve
- **Lift-assist package** for 12-row models with 36", 38" and 40" spacings provides faster, easier lifting on endrows and for transport

## Auto-Reset Model 432

Model Size	Row Spacing	Approximate Weight			Transport Width	Transport Height
		With Bedding Disks	With Spring-Cushioned Lister Shovel	With Rigid Lister Shovel		
6-Row Rigid	30"	5,700 lbs.	4,620 lbs.	5,010 lbs.	16'6"	—
	36"	5,950 lbs.	4,840 lbs.	5,240 lbs.	21'	—
	38"	5,950 lbs.	4,840 lbs.	5,240 lbs.	21'	—
8-Row Rigid	30"	7,000 lbs.	5,550 lbs.	6,050 lbs.	22'	—
8-Row Folding	36"	8,970 lbs.	6,525 lbs.	7,025 lbs.	16'6"	11'6"
	38"	8,970 lbs.	6,525 lbs.	7,025 lbs.	16'6"	11'6"
	40"	8,970 lbs.	6,835 lbs.	7,335 lbs.	16'6"	11'6"
12-Row Folding	30"	13,675 lbs.	11,300 lbs.	12,100 lbs.	15'6"	12'4"
	36"	13,875 lbs.	11,550 lbs.	12,300 lbs.	21'7"	12'3"
	38"	13,875 lbs.	11,550 lbs.	12,300 lbs.	21'3"	13'1"
	40"	13,975 lbs.	11,875 lbs.	12,675 lbs.	21'3"	13'10"

Note: Specifications are less markers and bedding gang gauge wheels

See your nearest Unverferth dealer today for complete details about the Ripper-Bedder, or check our website at [www.umequip.com](http://www.umequip.com).

Due to continuing improvements in the design and manufacture of Unverferth products, all specifications contained herein are subject to change without notice. For relevant patent marking, please visit [unverferth.com/patents](http://unverferth.com/patents).

**Unverferth**  
Manufacturing Company, Inc.

© 2019 Unverferth Manufacturing Co., Inc.  
Printed in U.S.A.

P.O. Box 357 | Kalida, OH 45853 | [unverferth.com](http://unverferth.com) | 419.532.3121

®™ Trademarks, registered or applied for, of Unverferth Manufacturing Co., Inc., Kalida, OH

Additional facilities in California, Georgia, Iowa, Nebraska, North Dakota, Oregon, Texas, Ontario and Saskatchewan, Canada



URB91517000M5